


Wingspan Series
WS-3360

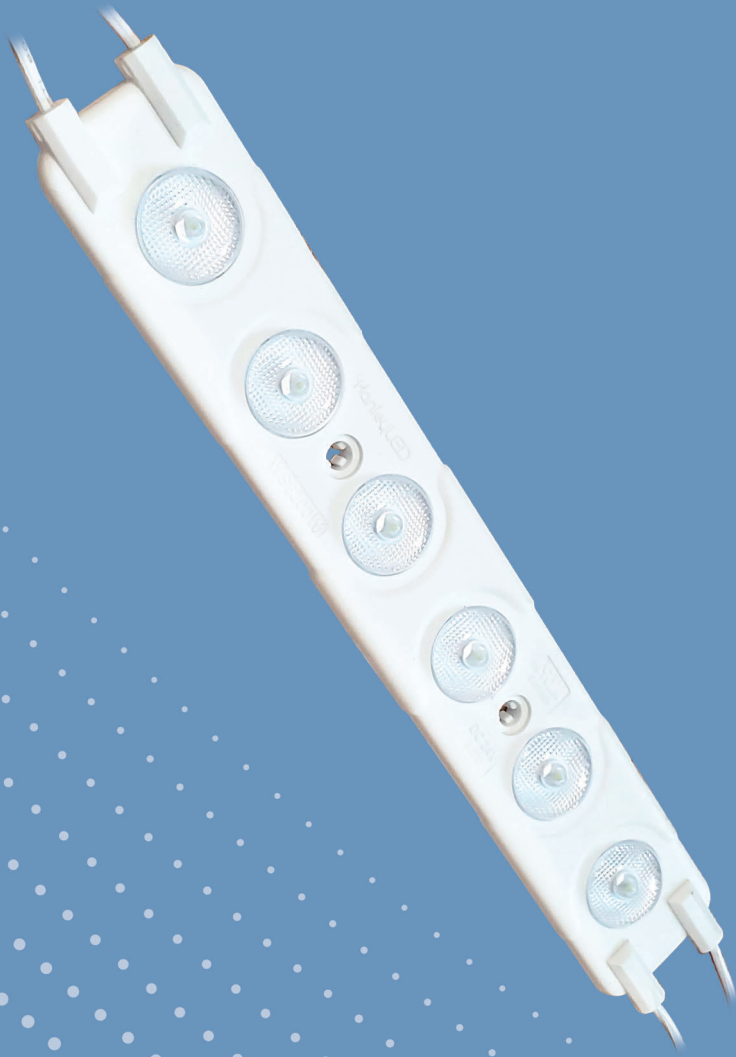


Spread Your Wings. Enjoy the FREEDOM!
Wingspan 3360

HanleyLED WS-3360 Features

One Size Fits All!

Custom projects come with custom challenges. Which is why you need the 1 product that does it all. Because you only need **21 modules** to illuminate a **5'x10'x6"** cabinet, you can customize your experience. Whether you fabricate hundreds of the same cabinet or build custom pylons, experience true **FREEDOM** with the High Efficiency Wingspan 3360.

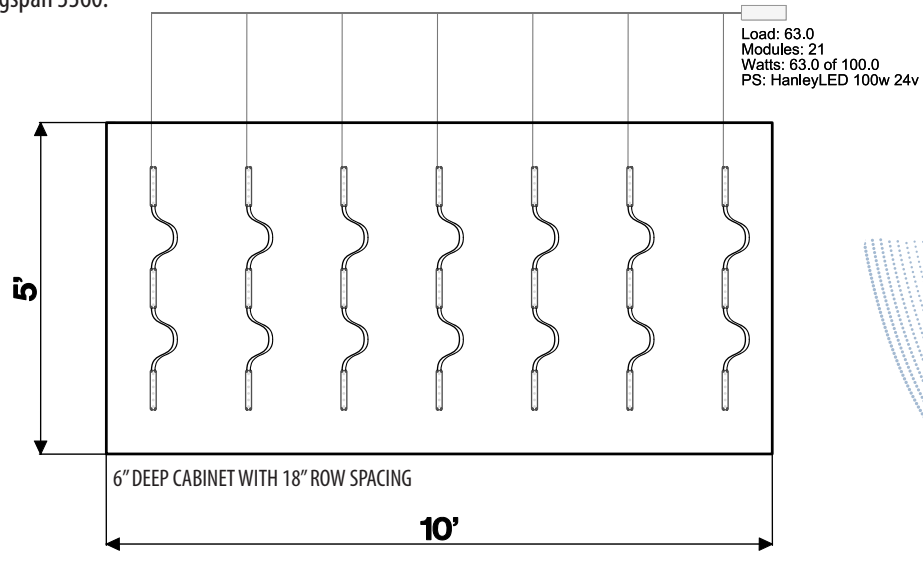


Customize your labor with the most versatile module for cabinet lighting. Maximize spacing for the least amount of labor ever or customize spacing to work around internal structure and varying depths.

Customize your brightness with only 1 module every 2 feet. Space Wingspan 3360 further apart or closer together for desired brightness.

Customize your power by choosing as few or as many modules as your need.

Customize your depth by positioning WS3360 anywhere from 5" – 18" from the face

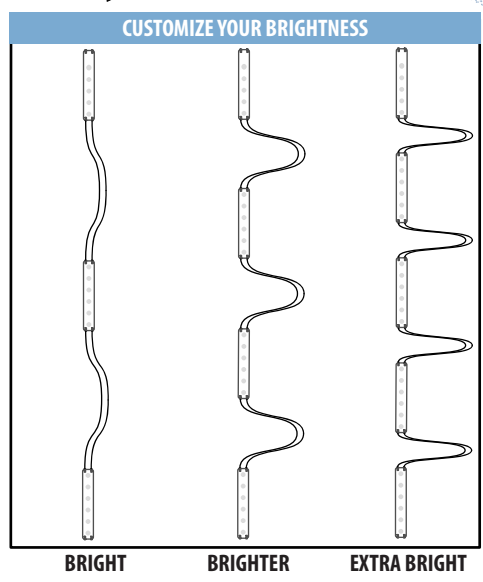

| Wingspan 3360 Spacing Chart | |
|-----------------------------|-----------------|
| Depth | MAX Row Spacing |
| 5" | 13" |
| 6" | 18" |
| 7" | 22" |
| 8" | 24" |
| 9" | 28" |
| 10"-15" | 30" |

- Super Wide 175° Wingspan Optics
- Wide depth range 5" – 18" from sign face
- Efficacy: 165 lm/w
- 24 vdc
- 7yr Product / 5yr Labor Warranty

Wingspan Series

WS-3360



LM79 LM80 L70:5+ YEARS

Features


- Super Wide 175° Wingspan Lens
- Customizable brightness with wide spacing between mods
- Extremely Wide depth range 5" – 18" from sign face
- Ideal for Single Sided cabinets or 2-bay double sided signs
- Efficacy: 165 lm/w
- 24 vdc
- 24" Max Centers at 8" from face (may vary depending on sign face type)
- 10yr Product / 5yr Labor Warranty
- HanleyPRO Layout Creator at hanleyledsolutions.com

Specifications

| | |
|--------------------------|--------------------------------------------------------------------------------|
| Viewing Angle | 175° |
| Watts | 3w/mod Customizable w/ft |
| Luminous Efficacy | 165(lm/W) |
| Input Voltage | 24vDC |
| Modules/Foot | 0.6/ft. fully stretched Customizable up to 1 mod every 2ft |
| Protection Grade | IP67 |
| Packaging | Anti-static bag, 20 mods (33.3ft)/bag |
| Warranty | 10 Year (Product) / 5 Year (Labor) |
| Operating Temp. | -25 ~ +60 °C / -13 ~ +140 °F |
| Storage Temp. | -40 ~ +70 °C / -40 ~ +158 °F |
| Cascade | 20 mods Single-ended Power Feed (pcs) 40 mods Double-ended Power Feed (pcs) |

| Color | Part# | Color Temp | Lumens |
|------------|----------------|------------|---------------------------------|
| Pure White | HLED-WS3360W24 | 7000k | 495 lm/mod Customizable lm/ft |

Light Distribution

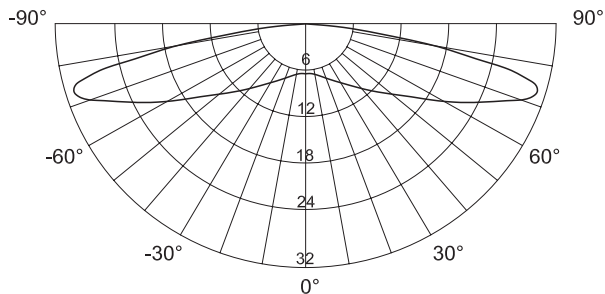

| | MAX POWER SUPPLY LOAD | | | | | | | |
|---------|-----------------------|---------|---------|----------|----------|----------|----------|----------|
| MODEL | 35W 24v | 60W 24v | 96W 24v | 100W 24v | 150W 24v | 192W 24v | 240W 24v | 288W 24v |
| WS-3360 | 11mods | 20mods | 32mods | 33mods | 50mods | 64mods | 80mods | 96mods |

Profile Drawings

